

## MA and MX STATIC MIXERS




The STATOMIX® MA series mixers feature simple twist-lock mounting. The MA mixer's first element automatically aligns itself precisely with the dividing wall of the MIXPAC® 50 Cartridge, separating Part A and Part B. As a result of this patented design, the STATOMIX® MA mixer prevents curing at the interface of the cartridge.

The STATOMIX® MA series mixer comes in a wide variety of sizes and will mix virtually any 2-part material including epoxies, silicones, urethanes, acrylics and polyesters.

The STATOMIX® MA series mixers can also be used for a wide variety of low pressure meter mix applications.

### TECHNICAL DATA

- Outer Housing: Polypropylene
- Elements: Polypropylene
- Retaining Method: Bayonet style, twist-lock

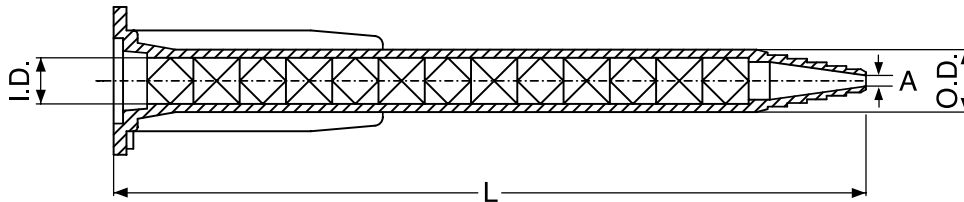

Part Number	Inner Dia. I.D. (Inches)	Inner Dia. I.D. (mm)	Number of Elements	Outer Dia. O.D. (Inches)	Outer Dia. O.D. (mm)	Length L (Inches)	Length L (mm)	Nozzle Dia. A (Inches)	Nozzle Dia. A (mm)	Outlet Style	Approx. Content Volume (ml)
MA 3.0-07-S	.118	3.00	7	.181	4.6	1.31	33.3	.039	1.0	Tapered	0.19
MA 3.0-13-S	.118	3.00	13	.181	4.6	2.00	50.8	.039	1.0	Tapered	0.29
MA 3.0-17-S	.118	3.00	17	.181	4.6	2.46	62.6	.039	1.0	Tapered	0.34
MA 4.0-13-S	.157	4.00	13	.228	5.8	2.60	66.0	.079	2.0	Tapered	0.60
MA 4.0-17-S	.157	4.00	17	.228	5.8	3.21	81.6	.079	2.0	Tapered	0.75
MA 5.4-07-S	.213	5.40	7	.276	7.0	2.19	55.7	.059	1.5	Stepped	0.78
MA 5.4-13-S	.213	5.40	13	.276	7.0	3.33	84.6	.059	1.5	Stepped	1.36
MA 5.4-17-S	.213	5.40	17	.339	8.6	4.08	103.6	.059	1.5	Stepped	1.68
MA 5.4-21-S	.213	5.40	21	.339	8.6	4.88	124.0	.059	1.5	Stepped	2.01
MA 6.3-12-S	.250	6.35	12	.343	8.7	3.82	97.0	.059	1.5	Stepped	2.08
MA 6.3-17-S	.250	6.35	17	.343	8.7	5.04	128.0	.059	1.5	Stepped	2.92
MA 6.3-21-S	.250	6.35	21	.343	8.7	6.02	153.0	.059	1.5	Stepped	3.57
MA 6.3-21-L	.250	6.35	21	.343	8.7	5.96	151.5	.063	1.6	Luer-End	3.33
MA 6.8-12-I	.268	6.80	12	.339	8.6	3.44	87.5	.193	4.9	Straight End	2.24
MA 0517-0413	.213 - .157	5.40 - 4.00	17 + 13	.224 - .220	5.7 - 5.6	5.87	149.0	.059	1.5	Stepped	2.10
<b>FOR 4:1 AND 10:1 CARTRIDGES ONLY</b>											
MX 3.0-17-S	.118	3.00	17	.181	4.6	2.46	62.6	.039	1.0	Tapered	0.34
MX 4.0-17-S	.157	4.00	17	.228	5.8	3.21	81.6	.079	2.0	Tapered	0.75
MX 5.4-17-S	.213	5.40	17	.339	8.6	4.08	103.6	.059	1.5	Stepped	1.53
MX 0517-0413	.213 - .157	5.40 - 4.00	17 + 13	.224 - .220	5.7 - 5.6	5.87	149.0	.059	1.5	Stepped	2.10